

**EXCELLENCE IN STRAPPING SOLUTIONS** 



# **RO-M FUSION**

Automatic strapping machine for universal applications

#### **EXCELLENCE IN STRAPPING SOLUTIONS**

# **RO-M FUSION**

## STANDARD FEATURES

- Thermostatically controlled heat-weld sealing
- Wear-free DC drive, brushless motor technology
- Strap end detection with ejection of remaining strap
- Easy strap coil change and threading system
- Toggle switch for super soft strapping of individual or very soft packages
- Wear-free, controlled strap track system
- Adjustable strap tension via potentiometer
- Energy-saving drives
- Electronic control
- Hinged front table top
- Sturdy foot pedal for cycle start
- 4 castors of which 2 are lockable
- Structural coating in RAL 5010, gentian blue
- Table top length 600 mm or alternatively 700 mm or 800 mm
- CE marking inclusive conformity declaration

### **OPTION:**

• E-package: Automatic strap release via light sensor with selection of single or permanent strapping and strap tension control via light barrier. Three different strap tensions are explicitly storable by the customer.

### TECHNICAL DATA

#### Performance:

Up to 55 cycles per minute at a frame size of 600 mm x 500 mm

FRAME SIZES (WxH): 600 mm x 500 mm

800 mm x 600 mm 1250 mm x 600 mm

**WORKING HEIGHT:** 800 mm - 905 mm

STRAPS:

Standard machine grade 5, 8 or 12 mm PP strap

#### STRAP COIL DISPENSER:

Core diameter: 200 mm Core width: 190 mm

**ELECTRICITY:** 

Voltage: 100-240 V, 50/60 Hz,


1L+N+PE

Power consumption: approx. 0.2 kW

**SEALING UNIT:** Standard 3 sealing unit

WEIGHT: 180-240 kg

	Α	В	C	D	E
600 x 500	990	600	500	1370 – 1475	1090
800 x 600	1190	800	600	1470 – 1575	1290
1250 x 600	1640	1250	600	1470 – 1575	1740

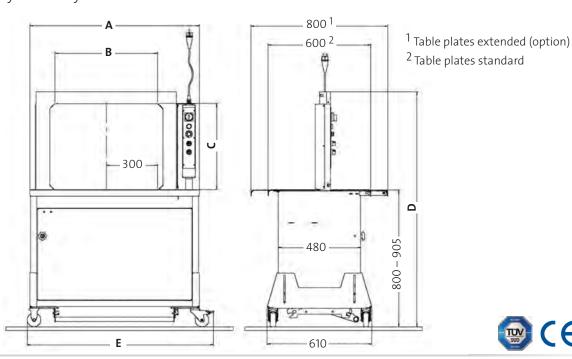







EXCELLENCE IN STRAPPING SOLUTIONS

#### **MOSCA GMBH**

Gerd-Mosca-Straße 1 D-69429 Waldbrunn/Germany Tel.: +49 6274/932-0

Fax: +49 6274/932-400 118 Tel. Tech. Service: +49 6274 / 932-146

E-Mail: info@mosca.com Internet: www.mosca.com 12 / 19 Subject to Alterations

The models of RO-M FUSION are adjustable to one strap width of all quality PP straps of 5, 8 or 12 mm. Obtainable directly from Mosca, produced in one of Europe's most modern manufacturing plants. Combinable with maintenance contracts by Mosca a one-stop solution.

